

# EMERGENCY ACTION PLAN

FAWN LAKE DAM  
SPOTSYLVANIA COUNTY, VIRGINIA

Inventory Number: 17709



March 2011

Website Version

## **DISTRIBUTION**

NTS/Fawn Lake Project Manager (1)  
Fawn Lake Property Owners Association (2)  
Virginia Department of Conservation and Recreation, Division of Dam Safety (2)  
Virginia State Emergency Operations Center (1)  
Spotsylvania County Emergency Operations Center (3)  
Virginia Department of Transportation (1)  
ECS Mid-Atlantic, LLC (1)

## **EXECUTIVE SUMMARY**

This summary is primarily for the use of someone who has not reviewed this plan prior to an actual emergency. While this plan will be better executed when properly reviewed prior to an emergency, there may be times where key participants may not be available. Therefore, this summary is only meant to help facilitate the initial response until such time that a proper briefing of the plan to participants can occur.

The Emergency Action Plan is formatted to be used as a planning tool as well as a working document. In case of emergency, the sections with the red colored tabs at the top of the pages will be of the most immediate use to someone who has never read this plan.

Inundation maps are contained within the Appendix of this Emergency Action Plan. The maps show the area downstream of the Fawn Lake Dam that will be flooded in the event of a dam breach. The inundation zone extends from the Fawn Lake Dam to a point approximately 1.6 miles downstream of Interstate 95 and approximately 1.6 miles upstream of the confluence of the Po and Ni River. The flood travel time in the event of a dam break is shown on the maps for various points along Greenfield Creek and the Po River. In the event of a dam breach during a full probable maximum flood event, the total flood travel time to reach Interstate 95 is approximately 6 hours.

There are 8 occupied structures within the sunny day breach inundation zone. The flood wave travel time to the first structure located at 7300 Snow Hill Drive is approximately 9.4 hours.

There are 69 occupied structures within the PMF breach inundation zone. The flood wave travel time to the first structure located at 8521 Heron Pointe Way is approximately 2.7 hours

A list of structures that will be inundated due to a dam breach is contained in the Appendix of this plan. Phone numbers that were available for those structures for are shown on the list.

Upon detection of an existing or potential emergency, it is preferable that the dam operator and NTS be notified immediately. If the observed condition is such that the situation is not urgent (e.g. a small seep flowing clear), it is best if the owner's engineer can be requested to make a site visit to make a determination as to the severity and urgency of the condition. However, if these people can not be contacted, then notification should be made to the Spotsylvania County Emergency Dispatch Center. Phone numbers for all participants are located in Appendix C. Regardless of the level of severity or urgency of the situation, it is best to err on the side of caution and notify emergency services early. A notification flow chart is located on page 9 of this document.

Because of method, procedures, and assumptions used to develop the flooded areas, the limits of flooding shown and flood waver travel times are approximate and should be used only as a guideline for establishing evacuation zones. Actual areas inundated will depend on actual failure or flooding conditions and may differ from areas shown on maps.



## TABLE OF CONTENTS

EXECUTIVE SUMMARY .....	2
TABLE OF CONTENTS .....	4
I. CERTIFICATIONS .....	6
II. NOTIFICATION FLOW CHART .....	11
III. STATEMENT OF PURPOSE .....	12
IV. PROJECT DESCRIPTION .....	13
Description of Dam .....	13
Known Conditions .....	13
INUNDATION ZONE.....	14
Residences Affected by a Breach or Major Flooding.....	14
Public Roadways Affected .....	14
Impoundments .....	16
Critical Facilities .....	16
Time Line .....	16
V. EMERGENCY DETECTION, EVALUATION, AND CLASSIFICATION.....	17
Detection.....	17
Evaluation .....	17
Normal Operating Conditions .....	17
Extreme Loading Conditions.....	17
Classification.....	18
VI. GENERAL RESPONSIBILITIES.....	19
A. Impounding Structure Owner Responsibilities.....	19
Dam Operation and Maintenance.....	19
B. Responsibility for Notification .....	19
C. Responsibility for Evacuation .....	19
D. Responsibility for Duration, Security, Termination, and Follow-up.....	19
E. EAP Coordinator Responsibility .....	20
VIII. PREPAREDNESS .....	21

Surveillance .....	21
Response During Periods of Darkness.....	21
Access to the Site .....	21
Response During Weekends and Holidays .....	21
Response During Periods of Adverse Weather .....	21
Alternate Systems of Communication.....	21
Emergency Supplies and Information .....	21
Stockpiling Materials and Equipment.....	21
Potential Mitigating Actions.....	22
Open Low Level Outlet .....	22
Reduction in Freeboard and/or Loss of Dam Crest Width .....	22
Slide on the Embankment Slope.....	22
Piping through the Embankment, Foundation, or Abutments .....	22
Failure of Outlet Works .....	22
VII. Inundation Maps .....	24
IX. Appendices .....	25
A. Appendix A - Investigation and Analysis of Impounding Structure Failure Floods.....	26
B. Appendix B - Plans for Training, Exercising, Updating and Posting the EAP .....	27
C. Appendix C - Site-Specific Concerns.....	28
D. Appendix D - Participants .....	29
E. Appendix E – Emergency Supplies.....	30
F. Appendix F – Alert Worksheet .....	31
G. Appendix G – Warning Worksheet .....	32
H. Appendix H – Failure Worksheet.....	33
I. Appendix I – Structures in Sunny Day Dam Breach Inundation Zone.....	34
J. Appendix J – Structures in the PMF Dam Breach Inundation Zone.....	35
K. Appendix K – Original Dam Design Plans (Partial Set) .....	37
L. Appendix L – Fawn Lake Area Map .....	38

**SECTION VIII and Appendices K and L are provided as separate files.**

## I. CERTIFICATIONS

### Certification by Dam Owner/Operator

I certify that procedures for implementation of this Emergency Action Plan have been coordinated with and a copy given to each local Emergency Services Coordinator serving the areas potentially impacted by the dam. Also, that a copy of this Emergency Action Plan has been filed with the Virginia Department of Emergency Management in Richmond and a copy of the Dam Break Inundation Map has been provided to the local government office with plat and plan approval authority or zoning responsibilities as designated by the locality for each locality in which the dam break inundation zone resides; that this plan shall be adhered to during the life of the project; and that the information contained herein is current and correct to the best of my knowledge.

UTS/VIRGINIA DEVELOPMENT COMPANY by Ralph A. DeRosa, SVP  
(Signature of Dam Owner/Operator)

This 6<sup>th</sup> day of April, 2011

Printed Name: Ralph DeRosa

### Certification by Preparer

I certify that the information provided in this report has been examined by me and found to be true and correct in my professional judgment.

Peter W. O'Hara  
(Signature of Preparer)

This 7<sup>th</sup> day of April, 2011

Printed Name: Peter W. O'Hara Title: Principal Engineer

Address: 915 Maple Grove Drive, Suite 206, Fredericksburg, Virginia 22406

Phone: (540) 785-6100


**Page Left Blank  
Intentionally**

**Page Left Blank  
Intentionally**

**Page Left Blank  
Intentionally**

**Page Left Blank  
Intentionally**

## II. NOTIFICATION FLOW CHART

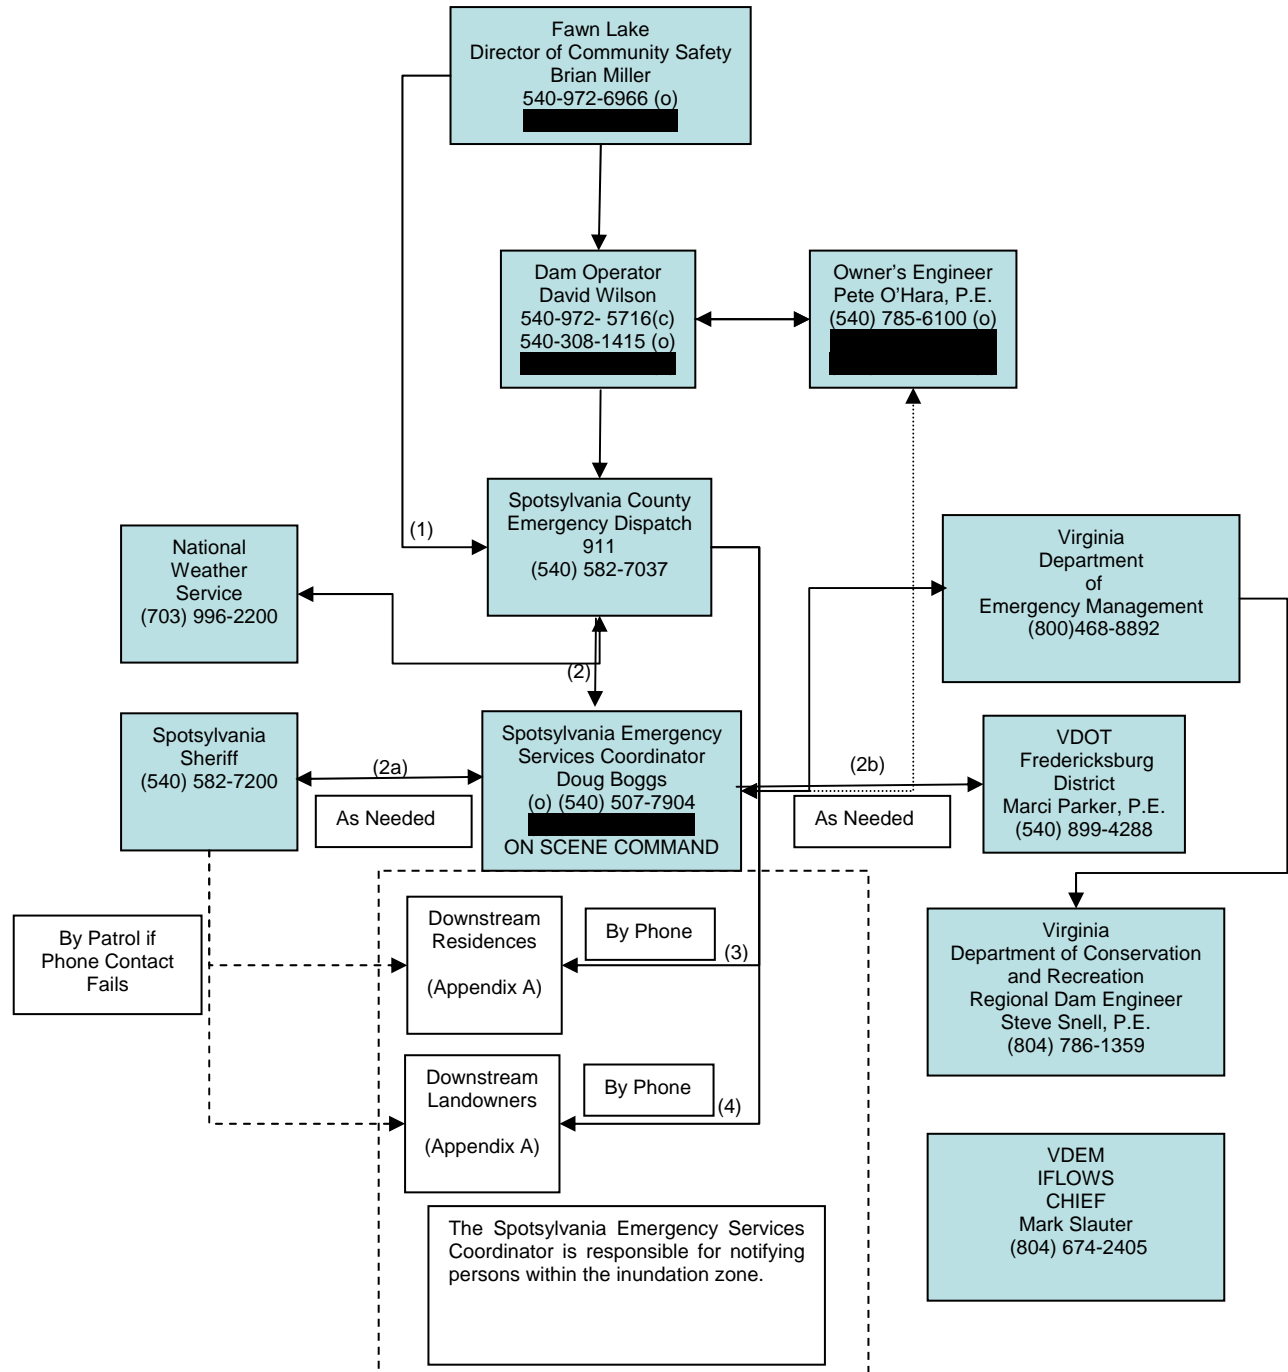

Note: (#) – Indicates order of notification

### **III. STATEMENT OF PURPOSE**

The purpose of this Emergency Action Plan (EAP) is primarily to safeguard lives and secondarily to reduce property damage to the citizens of Spotsylvania County who live downstream of Fawn Lake Dam in the event of flooding caused by high flows from or failure of Fawn Lake Dam. This EAP provides the following:

1. Information about Fawn Lake Dam.
2. A basis for pre-planning the necessary response by the dam owner/operator and the responsible local, state, and federal emergency organizations.
3. Contact information for persons residing within the inundation zone of the dam in order to provide timely warning of a dam emergency, and
4. A listing of conditions which could lead to the failure of the dam and typical responses.

It is not the intent of this plan to be used for “cookbook” solutions for all situations. Rather it should be used in conjunction with the sound judgment of engineering and emergency services professionals.

## IV. PROJECT DESCRIPTION

### **Description of Dam**

Fawn Lake Dam is located on Greenfield Creek in Spotsylvania County, Virginia. The dam is owned by NTS Development, which is the developer of the Fawn Lake Subdivision. The dam creates a 45.5 acre lake used for recreational purposes. The lake's drainage area is 4.14 square miles. The reservoir flood storage capacity is 6,875 acre-feet at the emergency spillway crest. Downstream of the dam, Greenfield Creek runs through Beal's farm, passes under Catharpin Road between Solon Drive and Robert E. Lee Drive and then enters the Po River. Original Design Plans (with some sheets missing) are contained in the Appendix. All elevations are referenced to MSL.

The main components of the dam are:

1. A homogenous earth embankment, approximately 2,230 feet long with a crest elevation of 343 feet and an approximate structure height of 61 feet.
2. A 2.5H: 1V to 3.0H: 1V upstream embankment slope with a 10 feet wide berm at elevation 336 feet, a 17 feet wide crest, and a 2.5H: 1V downstream slope.
3. A concrete rectangular drop inlet principal spillway, with interior dimensions of 3 feet by 9 feet. It has two inlets at elevation 335.5 feet and a 30 inch diameter gated inlet at elevation 284.
4. A pre-stressed cylinder concrete principal spillway conduit and outlet, 36 inches in diameter with an outlet invert elevation of 281.0 feet. A series of anti-seep collars provide seepage control at the downstream end of the conduit.
5. A riprap lined stilling pool.
6. A vegetated earth channel emergency spillway, 200 feet wide at the bottom with a control elevation of 338 feet located at the left abutment.

### **Known Conditions**

When partially opened, the low level outlet causes the principal spillway conduit to cycle between partial and full flow. This causes a loud booming noise and vibration of the inlet riser. While not an immediate threat to the dam's structural integrity, the low level outlet should be operated in a full open or full closed position to avoid this condition.

## **INUNDATION ZONE**

An update breach analysis of the Fawn Lake Dam and a mapping of the downstream inundation zone were completed by Dewberry & Davis in March of 2010. A breach analysis is the modeling of how a breach of the embankment would affect the downstream floodplain. It takes into account the volume in the reservoir, the physical dimensions of the embankment, and the topography of the downstream floodplain. This model is used to determine the area which would be inundated if the embankment were to breach under a number of scenarios ranging from a “sunny day” failure where the embankment fails due to internal erosion to an overtopping of the embankment during a “probable maximum flood” (PMF). The area that is flooded (or inundated) due to these scenarios is mapped and presented as an inundation zone map.

The analysis extended from the Fawn Lake Dam to a point just approximately 1.6 miles downstream of Interstate 95 and approximately 1.6 miles upstream of the confluence of the Po and Ni River. The inundation zone ends approximately 14 miles downstream of the dam. Inundation maps showing the area that would be inundated by a sunny day breach and a PMF breach as well as failure flood profiles for the floodplain are included in Appendix K.

### ***Residences Affected by a Breach or Major Flooding***

Based on our analysis, there are 8 residences that may be affected by floodwater during a sunny day breach and 69 residences that may be affected by a PMF breach. A listing of structures affected by a sunny day breach is included in Appendix G and a listing of structures affected by a PMF is included in Appendix H.

### ***Public Roadways Affected***

Roadways that are expected to be submerged or partially submerged during an PMF Breach are as follows:

1. West Catharpin Road (Rte. 608) – From 11236 West Catharpin Road to 11670 West Catharpin Road. A length of approximately 3,000 ft.
2. Catharpin Road (Rte. 612) – 9768 Catharpin Road to intersection of Catharpin Road and Corbin Lane.
3. Corbin Lane - From intersection of Catharpin Road (Rte. 612) to 4,250 ft. west of intersection.
4. Mill Pond Road - from intersection with Beaver Lane to 2,000 ft. south of intersection.
5. Private Drive – Located on east side of Mill Pond Road between Fox Hunt Trail and Vanreenen Way. Beginning 530 ft. from intersection with Mill Pond Road and continuing past that point approximately 300ft.
6. Vanreenen Way – Beginning approximately 1,000 ft. east from intersection with Mill Pond Road and continuing past that point approximately 225 ft.
7. Mystic Lane – Beginning approximately 2,000 ft. north of the Intersection with Robert E. Lee Drive and Mystic Lane, and continuing past that point approximately 800 ft.
8. JR Montgomery Lane – Beginning approximately 900 ft. north of intersection with Robert E. Lee Drive and continuing north approximately 300 ft.
9. Robert E. Lee Drive (Rte. 608) – From 8974 Robert E. Lee Drive to 8528 Robert E. Lee Drive. A length of approximately 3,700 ft.
10. River Valley Lane – Beginning at the intersection with Robert E. Lee Drive (Rte. 608) and extending north on River Valley Lane approximately 1,100 ft.

11. Singing Wood Lane – Two areas along this road: (a) From approximately 8305 Singing Wood Lane to Singing Wood Lane 8100, (b) From approximately 8028 Singing Wood Lane to 8305 Singing Wood Lane.
12. Millwood Drive – Three areas along this road: (a) From approximately 8700 Millwood Dr. to 8802 Millwood Dr, (b) From approximately 8805 Millwood Dr to 8809 Millwood Dr, (c) From approximately 8909 Millwood Dr to 8911 Millwood Dr.
13. Millwood Court – West of 9009 Millwood Ct.
14. North Lake Drive – Two areas along this road: (a) Beginning at the Intersection of Jennings Lane and Northlake Drive, (Two isolated areas), go approximately 528 ft. west on Northlake Drive to the beginning of the inundated area for the length of approximately 158 ft, (b) proceed approximately another 1,000 ft. to the beginning of the inundated area for the length of approximately 264 ft.
15. Southlake Drive – Two areas along this road: (a) Beginning at the intersection of Jennings Lane and Southlake Drive, go approximately 580 ft. south to the beginning of the inundated area for a length of approximately 425 ft. (b) proceed approximately another 850 feet to the beginning of the inundated area for the length of approximately 700 feet.
16. Millwood Drive – Two areas along this road: (a) Intersection of Millwood Drive, east to end of Millwood Drive at cul-de-sac, (b) from approximately 8810 Millwood Drive to 8812 Millwood Drive.
17. Old Mill Lane – From approximately 8312 Old Mill Lane to 8314 Old Mill Lane.
18. Block House Road (Rte. 648) From approximately 7893 Blockhouse Road to 7812 Blockhouse Road over the Poe River.
19. Courthouse Road (Rte. 208) - 8150 Courthouse Road to 8044 Courthouse Road, a length of approximately 1,400 feet.
20. Snow Hill Drive – From approximately 7142 Snow Hill Drive to 7240 Snow Hill Drive.
21. Garner Farm Road – Beginning approximately 1,250 ft east of intersection with Courthouse Road and extending 1,000 ft beyond that point.
22. Blackfish Lane – Two location on this road: (a) Between Iowa Lane and Ponca Lane, (b) Between Kusan Lane and Cornstalk.
23. Laughing Water Lane – From intersection with Fawnskin Lane, east to end of Laughing Water Lane.
24. Fawnskin Lane – From Laughing Water Lane to Canonchet Lane.
25. Naomi Lane – From Laughing Water Lane to Snow Bird Lane.
26. Blackfoot Lane – For its entire length.
27. Algonquin Drive – From Blackfoot Lane to Seneca Drive.
28. Maya Lane – From Cliff Dweller Lane to Kickapoo Lane
29. Jefferson Davis Highway (Rte. 1) - 6828 Jefferson Davis Highway South to 6636 Jefferson Davis Highway, length of approximately 1,200 ft over the Po River.

30. North Roxbury Mill Road (Rte. 632) – From 6906 North Roxbury Mill Road to 6973 North Roxbury Mill Road over the Po River

31. Interstate 95 - I-95 over the Po River at approximately mile marker 119.

Bridges that would be affected include:

1. Catharpin Road (Rte. 612) over the Po River
2. Mill Pond Road over Wright's Pond
3. Robert E. Lee Drive over the Po River between 8700 and 8517
4. Block House Road (Rte. 648) over Po River
5. Courthouse Road (Rte. 208) over the Po River
6. Jefferson Davis Highway (Rte.1) over the Po River
7. North Roxbury Mill Road (Rte. 632) over the Po River
8. Interstate 95 over the Po River

### ***Impoundments***

Wright's Pond is the only impoundment within the inundation zone which has Fawn Lake Dam in its watershed. The dam at Wrights Pond will be overtopped during a dam breach. This dam should be inspected when the water recedes and prior to opening Mill Pond Road to traffic.

Jennings Pond and Lake Pocahontas may be inundated by the backwater during a dam breach. These dams should also be inspected after a breach event.

### **Critical Facilities**

No known critical facilities, such as hospitals, rescue and relief facilities, water supply facilities, or hazardous waste facilities are located in the hazard area.

### ***Time Line***

The estimated travel times of the flood wave from the time of breach to the bridges along the main channel are as follows:

	Initial Flood Wave	Peak Flood
Corbin Lane/Catharpin Road	15 min	54 min
Mill Pond Road	40 min	1hr 56min
Robert E. Lee Drive	1hr 30min	3hr 13min
XSEC 58352	2hr 40min	5hr 13min
Courthouse Road	2hr 55min	5hr 46min
Indian Acres	3hr 15min	6hr 28min
N. Roxbury Mill Road	3hr 40min	6hr 45min

Because of method, procedures, and assumptions used to develop the flooded areas, the limits of flooding shown and flood waver travel times are approximate and should be used only as a guideline for establishing evacuation zones. Actual areas inundated will depend on actual failure or flooding conditions and may differ from areas shown on maps.

A profile showing arrival time at various points along the main channel is shown on the Inundation Maps located in the Appendix K.

## V. EMERGENCY DETECTION, EVALUATION, AND CLASSIFICATION

This section describes the events or conditions that indicate an emergency, defines the stages of emergency, and describes how EAP participants and the public should be notified in the event of emergency.

### **Detection**

Existing or potential emergencies can be detected in various ways:

1. "Flash Flood Warnings" are issued by the National Weather Service when flash flooding is actually occurring or imminent in the warning area. It can be issued as a result of torrential rains, a dam failure, or ice jam.
2. Visual Inspections of embankment or reservoir levels during security patrols, maintenance of the embankment, or engineering inspections.
3. Earthquakes

Instrumentation on the dam includes staff gauges on the riser and adjacent to the emergency spillway, piezometers on the embankment and a V-notch weir at the outlet of the left toe drain. These can be used to detect significant changes in the dam that may lead to eventual failure.

### **Evaluation**

Existing and potential emergencies can be the result of normal operating conditions or extreme loading conditions. Each of these conditions has the potential to create conditions that could lead to an emergency. While not exhaustive, the following is a discussion of some possible conditions.

#### ***Normal Operating Conditions***

During normal operating conditions, seepage can develop within the embankment, inside the pipes that penetrate the embankment, or along the downstream toe. The danger of such seepage would be that it eventually leads to piping, (transport of soil from within the embankment) resulting in a cavity or "pipe" to be established from the point of beginning back to the reservoir. Seepage along the toe of the embankment can also weaken the slope causing a failure of the downstream slope. These situations can lead to the uncontrolled release of the reservoir.

Seepage should be evaluated periodically based on quantity of flow as well as turbidity. Seepage that is essentially stagnant and clear in color is generally not an urgent condition. However, when the flow increases and becomes turbid, an emergency should be declared. It is important to note that seeps can change in character very quickly; hence they should be taken seriously!

#### ***Extreme Loading Conditions***

**Flood Related Failure** is primarily the result of overtopping of the embankment particularly where there is a concentrated flow leading to erosion of the embankment. This erosion will eventually lead to a full or partial breach of the embankment. The potential for overtopping should be evaluated based on whether the reservoir level is rising, falling, or remaining steady as well as the current and forecast weather. Also, as the water level in the reservoir rises existing seeps may flow at a faster rate and begin to transport soil due to the increased head pressure. As stated above in the section regarding normal operating conditions, seeps should be taken seriously and monitored periodically for changes.

Flood or high water events are to be tracked using a system of "stages" which are defined as follows:

Stage I Condition	0.5 feet below emergency spillway control section
Stage II Condition	1.0 feet of flow in emergency spillway
Stage III Condition	2.0 feet of flow in emergency spillway

The emergency spillway can convey up to 4 feet of water prior to overtopping the embankment. The Surveillance section of this plan discusses the requirements for periodic monitoring of the water level.

Although extremely rare, **earthquake related failures** can result in liquefaction of the embankment, overtopping of the embankment due to deformation of the embankment or fault displacements, or the initiation of seepage related failures (e.g. damage to outlet works). A visual inspection of the entire embankment should be made as soon as possible after a seismic event and then weekly for four weeks afterward in order to detect cracks, sags, sloughs, slides, misalignments, or new seeps. A video inspection of the pipes that penetrate the embankment should also be made to check for misaligned joints, sags, or structural damage to the pipes.

### **Classification**

The three levels of emergency condition in order of increasing urgency are:

#### **Alert Condition**

An alert condition indicates a situation when there is no danger of dam failure, but flow conditions from the dam are such that flooding is expected to occur downstream of the dam. **This condition should be declared once the level of the lake reaches Stage I (0.5ft below emergency spillway) and rising.**

#### **Warning Condition**

A warning condition indicates that while dam failure **may** result, there is some amount of time available for further analyses/decisions to be made before dam failure is considered to be a foregone conclusion. During this condition, preparations should be made to notify persons downstream and close roads that would be affected by a dam failure. **This condition should be declared once the level of the lake reaches Stage II (1 foot of flow in emergency spillway) and rising.**

#### **Failure Notice**

A failure notice indicates that the dam has or is about to fail. For purposes of this plan “about to fail” should be interpreted by emergency management agencies as “has failed”. It is critical that the time of failure be provided as this can be used to gauge the amount of time available in order to notify and evacuate persons downstream. **This condition should be declared once the level of the lake reaches Stage III (2 feet of flow in the emergency spillway) and rising.**

Declaration of an emergency can be a very controversial decision. The issue should not be debated too long. An early decision and declaration are critical to maximize available response time.

## **VI. GENERAL RESPONSIBILITIES**

### **A. Impounding Structure Owner Responsibilities**

#### ***Dam Operation and Maintenance***

The owner, NTS Development maintains the dam and David Wilson is the dam operator. An emergency phone number list is located in Appendix C.

The dam operator works at Fawn Lake and observes the dam two or three times a year during inspections and routine maintenance. The operator is also on call during high water conditions.

The dam owner is responsible for enacting the EAP. The owner and the owner's engineer are responsible for coordinating the Emergency Action Plan.

### **B. Responsibility for Notification**

The following persons or agencies are authorized to implement this plan:

1. Owner – Ralph DeRosa
2. Owner's Engineer – Peter O'Hara
3. Dam Operator – David Wilson
4. Fawn Lake Security Department – Brian Miller or Shift Supervisor
5. Fawn Lake Maintenance Department – David Wilson
6. Any State or Local Emergency Management Agency
7. Virginia Department of Dam Safety and Floodplain Management

Detection of a condition or event that is the basis for an existing or potential emergency will most likely be by Fawn Lake's Community Safety Department during routine patrols or Fawn Lake's Maintenance Department during routine maintenance. Upon detection, it is preferable that the dam operator and NTS be notified immediately. If the observed condition is such that the situation is not urgent (e.g. a small seep flowing clear), it is best if the owner's engineer can be requested to make a site visit to make a determination as to the severity and urgency of the condition. However, if these people cannot be contacted, then notification should be made to the Spotsylvania County Emergency Dispatch Center.

Upon notification, the party that first detected the condition shall proceed to the dam and establish constant monitoring until relieved. At the same time, the owner, owner's engineer, and Emergency Services Coordinator shall proceed to the dam to make an initial assessment. In order to facilitate this initial assessment, Fawn Lake Security should be notified that first responders will be arriving at the gate and will need access and/or directions to the dam.

Once the initial site visit has been completed, a command post should be established at the Fawn Lake HOA Clubhouse. The location of the clubhouse is show on the area map contained in Appendix J of this report. A holding area for members of the media should also be established should the emergency condition attract media attention.

### **C. Responsibility for Evacuation**

Warning and evacuation of persons downstream is the responsibility of the local authorities.

### **D. Responsibility for Duration, Security, Termination, and Follow-up**

The dam operator is responsible for on-site monitoring of the situation at the dam and keeping local authorities informed of developing conditions at the dam from the time that an emergency starts until the emergency has been terminated.

Fawn Lake Community Safety shall maintain access control to the dam during the duration of the emergency.

The Emergency Services Coordinator, in consultation with the Owner's Engineer, shall be responsible for the decision to declaring that the emergency is terminated.

Any roads, utilities, and structures should be inspected prior to reentry into flooded areas. The Virginia Department of Transportation, the Building Official, and appropriate utility agencies should be on hand to conduct the inspections. Photographs and written logs should be used to document any damage. The Spotsylvania County Sheriff's department will control access into these areas until such time that these areas are declared safe.

The owner's engineer shall convene an initial emergency evaluation conference within 7 days of the termination of the emergency to be attended by representatives of all participants in the emergency event. A written report shall be prepared within 30 days of the termination of the emergency.

#### **E. EAP Coordinator Responsibility**

The owner's engineer shall be the EAP Coordinator. Responsibilities of the EAP coordinator shall include preparing revisions to the EAP, establishing training seminars, and coordinating EAP exercises. The EAP Coordinator shall be the point of contract for any questions about the plan. Annual table top exercising confirming with 4VAC50-20-53 are required for this dam.

## VII. PREPAREDNESS

Actions can be taken that can help to mitigate the extent of damage resulting from any emergency events.

### **Surveillance**

The level of surveillance during an emergency event will depend on the severity and urgency of the condition.

For non-flooding events, daily surveillance should be the minimum.

For potential flooding events surveillance should be conducted with the maximum duration between observations as follows:

Stage I	Initiate within 2 hours of start of Flood Warning. Observe every hour thereafter.
Stage II	Every 30 minutes
Stage III	Continuously

It may be necessary to conduct surveillance more often when the reservoir level is rising rapidly.

### **Response During Periods of Darkness**

During periods of darkness it will be necessary to light the affected areas of the dam with flash lights and car headlights. Light plants should be brought in if the situation is expected to occur over a long period of time.

### **Access to the Site**

Access to the dam will normally be by car along Fawn Lake Parkway. In the case, where access to the low level outlet valve is necessary and the emergency spillway is either in operation or expected to operate, it will be necessary to access the dam from the right side using a dirt road. The map in Appendix J shows the primary and secondary access routes to the dam.

### **Response During Weekends and Holidays**

Fawn Lake Community Safety is available 24 hours a day, 7 days a week. Phone numbers are available for all key participants. **Phone numbers are contained in Appendix D on page 29.**

### **Response During Periods of Adverse Weather**

During flood watches, the dam operator will be available on property. The Fawn Lake Clubhouse will be available for shelter during this period.

### **Alternate Systems of Communication**

The primary system of communication will be the cell phone. **Phone numbers are contained in Appendix D on Page 29.** Alternate systems will be either landline from a neighboring house or the NTS office. If all phone service is unavailable, a radio on the Spotsylvania Emergency Net shall be issued.

### **Emergency Supplies and Information**

#### ***Stockpiling Materials and Equipment***

The following equipment and materials are available on-site.

1. Backhoe Loader
2. 1 Ton Dump Truck

Sand and stone can be obtained at a local quarry during business hours or possibly from the Virginia Department of Transportation after hours. A light plant can be rented from a local rental company. Contact information is contained in Appendix

### **Potential Mitigating Actions**

There are certain actions that can be taken to prevent a dam failure or mitigate damage if taken in a timely manner. However, it is important to note that these actions are not always appropriate and therefore should be carefully considered before attempting.

### **Open Low Level Outlet**

In most cases where the low level outlet pipe and the principal spillway pipe is not effected by the emergency, the concept of reducing the amount of the water behind the dam is sound. This will have two results. First, it reduces the amount of water released during a failure. Second, by decreasing the pressure head on any seeps, the velocity of water will be lowered which will eventually decrease below a point where it can no longer transport soil from the embankment.

A situation where this may complicate the situation might be where the principal spillway conduit became clogged with soil that has been piped into it or pipe joints has become misaligned due to an earthquake event. In that case, placing that conduit into full flow would likely accelerate the failure of the dam. A secondary concern with rapid lowering of the reservoir is surficial slope failures on the upstream slope. In the case of a true emergency, this would be tolerable as these failures are unlikely to cause an uncontrolled release from the dam. Finally, the potential of failure while personnel are opening the low level outlet should be considered prior to conducting such an operation. If it is decided to open the outlet, it is suggested that two people operate the hand wheel (which is geared low requiring many revolutions) and one person observe the embankment for changes. Also, an escape route should be planned prior to the operation should the need to evacuate the dam crest arise. The handwheel for the low level outlet is stored in NTS/Virginia's office at Fawn Lake.

### **Reduction in Freeboard and/or Loss of Dam Crest Width**

1. Place additional rip rap or sandbags in damaged areas to prevent further embankment erosion.
2. Lower the water level to an elevation below the damaged area.
3. Restore freeboard with sandbags or earth and rockfill.
4. Continue close inspection of the damaged area until the storm is over.

### **Slide on the Embankment Slope**

If a slide occurs on the embankment slope, initiate lowering the reservoir level to a level below the bottom of the failure.

### **Piping through the Embankment, Foundation, or Abutments**

Immediately open the low level outlet in order to lower the reservoir level. Then place an inverted filter at the exit area of the pipe if the flow velocity is slow enough. Also attempt to plug the flow on the upstream end with whatever material is available (hay bales, bentonite, or plastic sheeting) if the entrance is apparent in the reservoir.

In the case of small boils or seeps whose flow is relatively slow, an "inverted filter" can be constructed by placing layers of granular materials with increasing grain size over the affected area. Ideally, the first layer should be sand, followed by VDOT #78 stone, VDOT #57 Stone, and VDOT #3 Stone. The purpose of the inverted filter is to allow water to pass, but to prevent soil from being transported out of the dam. If the flow of water is too fast, it will simply transport the filter away. At that point, eventual failure is very likely.

### **Failure of Outlet Works**

Implement temporary measures to protect the damaged structure, such as closing an outlet or providing

temporary protection for a damaged spillway. Employ experienced, professional divers, if necessary, to assess the problem and possibly implement repair.

If possible, lower the water level to a safe elevation. If the outlet is inoperable, pumping, siphoning, or a controlled breach may be required.

Because of uncertainties about their effectiveness, these preventive actions should be carried out simultaneously with appropriate notification of an alert condition or warning condition.

## **VIII. Inundation Maps**

## **IX. Appendices**

## **A. Appendix A - Investigation and Analysis of Impounding Structure Failure Floods**

A dam breach analysis was performed for Fawn Lake Dam in accordance with the following procedures. Inflow and outflow hydrographs for Fawn Lake Dam and runoff hydrographs from downstream sub-basins were determined using the Corps of Engineers HEC-1 computer program. PMP rainfall amounts were taken from the National Weather Service (NWS) publication HMR-51 and distributed temporally in accordance with the Natural Resources Conservation Service (NRCS) publication TR-60 and spatially in accordance with NWS HMR-52. The resulting rainfall hyetographs were converted to runoff hydrographs using NRCS procedures for determination of runoff curve number, lag time, and unit hydrographs. The NRCS 24-hour, 5-point temporal rainfall distribution was determined to be the most conservative of all the NRCS temporal storm distributions and was selected for PMF development and subsequent dam break analysis. Dam breach simulation and determination of dam breach hydrographs was performed within HEC-1. The dam breach and no-breach hydrographs from HEC-1 were input into the Corps of Engineers HEC-RAS computer program (unsteady model simulation) to simulate passage of the flood waves through the stream valley downstream of the dam. Cross sections for the unsteady HEC-RAS model were developed based on USGS DRG topographic mapping. Peak water surface elevations from the unsteady HEC-RAS model for the dam breach and no-breach simulations were plotted on the USGS DRG topography in order to map the inundation zones. Spotsylvania GIS data was used to identify structures within the inundation zones.

## **B. Appendix B - Plans for Training, Exercising, Updating and Posting the EAP**

### **Training**

Training Sessions should be conducted annually for participants located on the property. The content for these sessions should orientation to the EAP and detection and evaluation of emergency events and conditions.

### **Exercising**

In conjunction with the training sessions, either a drill or a table top exercise will be conducted as required by 4VAC50-20-175.


### **Updating**

This plan shall be reviewed annually and changes distributed to all plan holders. Potential changes might include:

1. Changes in personnel.
2. Changes in telephone numbers.
3. Additions or deletions of structures and critical facilities within the danger reach.
4. New conditions that would affect flood flows or the extent of damage due to a dam failure.

### C. Appendix C - Site-Specific Concerns

There is a weir box located to the left the principal spillway that measures the quantity of flow from the left toe drain.

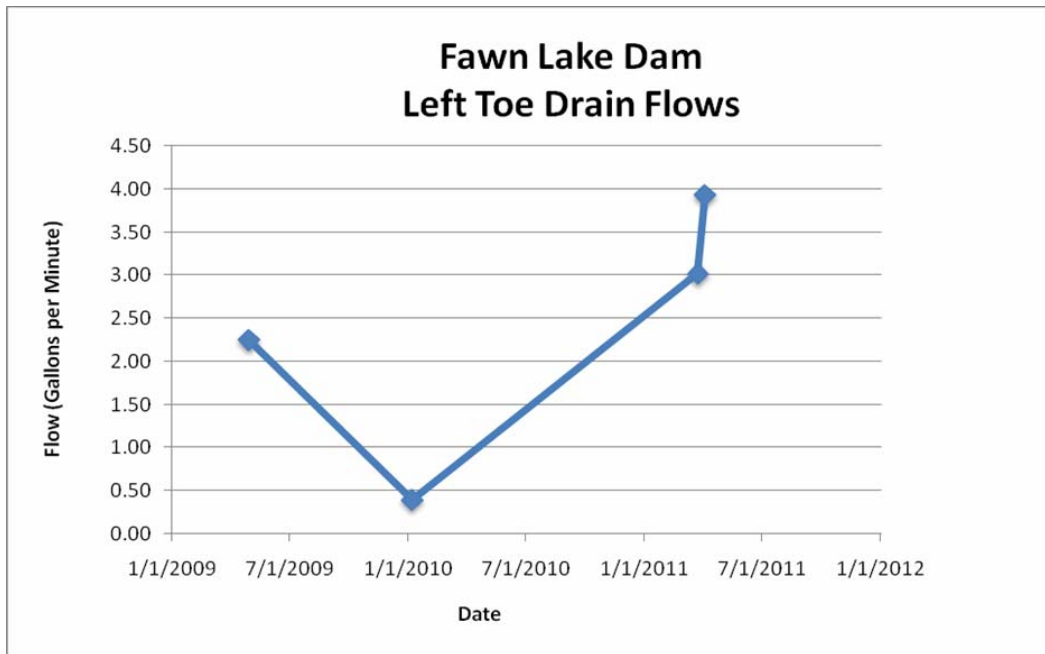

**Flow Rates for a 90 degree V-Notch Weir where H is the depth of water measured at the upstream side of the weirbox**

H (in)	Q (cfs)	Q (gpm)	H (in)	Q (cfs)	Q (gpm)
4	0.0000	0.00	6.75	0.0629	28.21
4.25	0.0002	0.07	7	0.0781	35.07
4.5	0.0009	0.40	7.25	0.0954	42.83
4.75	0.0024	1.10	7.5	0.1149	51.55
5	0.0050	2.25	7.75	0.1365	61.26
5.25	0.0088	3.93	8	0.1604	71.98
5.5	0.0138	6.20	8.25	0.1866	83.76
5.75	0.0203	9.11	8.5	0.2153	96.63
6	0.0284	12.72	8.75	0.2464	110.61
6.25	0.0381	17.08	9	0.2802	125.75
6.5	0.0495	22.23	9.25	0.3165	142.06

## D. Appendix D - Participants

<b>Participant</b>	<b>Point of Contact</b>	<b>Contact Information</b>
<b>Owner</b> NTS Development Company 11901 Longstreet Dr Spotsylvania, VA 22553	Ralph DeRosa	540-972-0400 - Office [REDACTED]
<b>Owner's Engineer</b> ECS Mid-Atlantic, LLC 915 Maple Grove Dr Ste 206 Fredericksburg, VA 22407	Peter O'Hara, P.E.	540-785-6100 - Office [REDACTED]
<b>Dam Operator</b> NTS Development Company 11901 Longstreet Dr Spotsylvania, VA 22553	David Wilson	540-972-5716 - Office [REDACTED]
<b>Dam Gauge Observer</b> Fawn Lake Community Safety		540-972-0394 - Phone
<b>County Emergency Services</b> Spotsylvania County Emergency Communications PO Box 1146 Spotsylvania, VA 22553	Mr. Doug Boggs Emergency Services Coordinator	Non Emergency 540-507-7904 – Office [REDACTED] Emergency -911
<b>Virginia Department of Transportation</b> Virginia Department of Transportation Fredericksburg Residency 87 Deacon Road Fredericksburg, VA 22405	Ms. Marci Parker, P.E.	540-899-4288 - Office
<b>Division of Dam Safety</b> Virginia Department of Conservation & Recreation Division of Dam Safety 203 Governor St Ste 402 Richmond, VA 23236-3713	Steve Snell Dam Safety Engineer	(804) 786-1359 - Office
<b>State Emergency Operations Center</b> Virginia Department of Emergency Management 10501 Trade Ct Richmond, VA 23236	Mark Slauter IFLOWS Chief (804) 674-2405	800-468-8892 - Phone 804-674-2400

**E. Appendix E – Emergency Supplies**  
**(Companies that can provide assistance in the event of an emergency)**

**CONTRACTORS**

---

Watershed Services (Contractor) 11206 Ledbetter Road Suite 5 Ashland, VA 23005	Mr. Scott Cahill	804-798-6995
W.C. Spratt Inc. 491 Central Road Fredericksburg, VA 22401	Mr. Doug Tait	540-373-2002
S.W. Rodgers 10500 Wakeman Drive, Suite 100 Fredericksburg, Virginia 22407	Mr. Charlie Catalano	540-898-2600

---

**EQUIPMENT RENTAL (Lights and Pumps)**

---

Sunbelt Rentals 1200 Belman Road Fredericksburg, VA 22401		540-710-1300 800-667-9328
United Rentals 10 Le Way Drive Fredericksburg, VA 22406		540-599-0053 800-877-3687
RSC Rentals 4616 Lassen Lane Fredericksburg, VA 22408		540-710-2300 800-222-7777

---

**MATERIALS - SAND**

---

Ennstone Inc 1170 Kings Highway, Fredericksburg, VA 22405-3814		540-361-1653
--	--	--------------

---

**MATERIALS – CRUSHED STONE**

---

9100 Luck Stone Ln Fredericksburg, VA 22407-5302		540-898-6060
---	--	--------------

---

## F. Appendix F – Alert Worksheet

### Alert Condition

An alert indicates that a potentially serious condition is developing and failure could occur.

<u>Date &amp; Time</u>	<u>Contact</u>	<u>Phone No.</u>
_____	Spotsylvania County Emergency Services	911
_____	Owner's Engineer	540-785-6100 Office ██████████
_____	Division of Dam Safety	804-786-1359
_____	Virginia Department of Emergency Management	800-468-8892

### Message

“An alert condition has been declared for Fawn Lake Dam. The Fawn Lake Dam Emergency Action Plan has been initiated.”

### Report Conditions:

1. Event or condition initiating the alert.
2. Details as described in the plan.

## G. Appendix G – Warning Worksheet

### Warning Condition

A warning condition indicates a serious condition has occurred and failure of the dam is probable.

<u>Date &amp; Time</u>	<u>Contact</u>	<u>Phone No.</u>
_____	Spotsylvania County Emergency Services	911
_____	Owner's Engineer	540-785-6100 Office ██████████
_____	Virginia Department of Emergency Management	800-468-8892

### Message

"A warning condition has been declared for Fawn Lake Dam. The Fawn Lake Dam Emergency Action Plan has been initiated."

### Report Conditions:

1. Event or condition initiating the warning
2. Details as described in the plan

## H. Appendix H – Failure Worksheet

### Failure Notice

A failure notice indicates a failure within the embankment dam and the loss of ability to impound the reservoir.

<u>Date &amp; Time</u>	<u>Contact</u>	<u>Phone No.</u>
_____	Spotsylvania County Emergency Services	911
_____	Owner's Engineer	540-785-6100 Office ██████████
_____	Virginia Department of Emergency Management	800-468-8892

### Message

“The Fawn Lake Dam has failed at \_\_\_\_\_ time. The Fawn Lake Emergency Action Plan has been initiated. Repeat, the Fawn Lake Dam has failed at \_\_\_\_\_time. “

### I. Appendix I – Structures in Sunny Day Dam Breach Inundation Zone

Sunny Day Dam Failure			
Structure	Address #	Street Name	Phone Number
1	7300	Snow Hill Drive	[REDACTED]
2	9415	Mill Pond Rd	[REDACTED]
3	9429	Mill Pond Rd	[REDACTED]
4	9428	Mill Pond Rd	[REDACTED]
5	9401	Mill Pond Rd	[REDACTED]
6	8100	Singing Wood Lane	[REDACTED]
7	8619	Robert E Lee Drive	[REDACTED]
8	7669	Courthouse Rd	[REDACTED]

**J. Appendix J – Structures in the PMF Dam Breach Inundation Zone**

PMF with Dam Failures			
Structure	Address #	Street Name	Phone Number
1	8521	Heron Pointe Way	[REDACTED]
2	7240	Snow Hill Drive	[REDACTED]
3	7300	Snow Hill Drive	[REDACTED]
4	8031	Singing Wood Lane	[REDACTED]
5	10530	Beaver Lane	[REDACTED]
6	8136	Singing Wood Lane	[REDACTED]
7	9415	Mill Pond Rd	[REDACTED]
8	9409	Mill Pond Rd	[REDACTED]
9	9429	Mill Pond Rd	[REDACTED]
10	9428	Mill Pond Rd	[REDACTED]
11	9452	Mill Pond Rd	[REDACTED]
12	9621	Paradise Ct	[REDACTED]
13	9401	Mill Pond Rd	[REDACTED]
14	9494	Vanreenan Way	[REDACTED]
15	9210	J R Montgomery Ln	[REDACTED]
16	9905	Mill Pond Rd	[REDACTED]
17	9200	J R Montgomery Ln	[REDACTED]
18	8135	Singing Wood Lane	[REDACTED]
19	8308	Singing Wood Lane	[REDACTED]
20	8217	Singing Wood Lane	[REDACTED]
21	8804	Millwood Dr	[REDACTED]
22	8802	Millwood Dr	[REDACTED]
23	9441	Southlake Dr	[REDACTED]
24	9430	Northlake Dr	[REDACTED]
25	9011	River Valley Ln	[REDACTED]
26	8323	Old Mill Ln	[REDACTED]
27	8700	Millwood Dr	[REDACTED]
28	8114	Singing Wood Lane	[REDACTED]
29	8510	Robert E Lee Dr	[REDACTED]
30	8424	Robert E Lee Dr	[REDACTED]
31	8415	Robert E Lee Dr	[REDACTED]
32	8421	Robert E Lee Dr	[REDACTED]
33	8425	Robert E Lee Dr	[REDACTED]
34	8921	River Valley Ln	[REDACTED]
35	8100	Singing Wood Lane	[REDACTED]
36	9001	River Valley Ln	[REDACTED]
37	8517	Robert E Lee Dr	[REDACTED]
38	8120	Courthouse Rd	[REDACTED]
39	8619	Robert E Lee Dr	[REDACTED]
40	8926	River Valley Ln	[REDACTED]
41	8911	River Valley Ln	[REDACTED]

Structure	Address #	Street Name	[REDACTED]
42	9003	Millwood Dr	[REDACTED]
43	8812	Millwood Dr	[REDACTED]
44	8810	Millwood Dr	[REDACTED]
45	8808	Millwood Dr	[REDACTED]
46	7669	Courthouse Rd	[REDACTED]
47	7806	Waterford Dr	[REDACTED]
48	7225	Snow Hill Drive	[REDACTED]
49	7716	Hunter Cove Dr	[REDACTED]
50	7741	Courthouse Rd	[REDACTED]
51	7640	Po River Dr	[REDACTED]
52	310	Clydesdale Ct	[REDACTED]
53	308	Clydesdale Ct	[REDACTED]
54	230	Morgan Ln	[REDACTED]
55	225	Morgan Ln	[REDACTED]
56	7630	Po River Dr	[REDACTED]
57	7708	Hunter Cove Dr	[REDACTED]
58	7700	Hunter Cove Dr	[REDACTED]
59	7315	Snow Hill Drive	[REDACTED]
60	7732	Courthouse Rd	[REDACTED]
61	7736	Courthouse Rd	[REDACTED]
62	7737	Courthouse Rd	[REDACTED]
63	7810	Courthouse Rd	[REDACTED]
64	7801	Courthouse Rd	[REDACTED]
65	6908	S Roxbury Mill Rd	[REDACTED]
66	7001	Jefferson Davis Hwy	[REDACTED]
67	6920	N Roxbury Mill Rd	[REDACTED]
68	47	Waucoma Trl	[REDACTED]
69	7235	Gardner Farm Rd	[REDACTED]

## **K. Appendix K – Original Dam Design Plans (Partial Set)**

## **L. Appendix L – Fawn Lake Area Map**